


HCRH0745 TYPE

TYPE

HCRH 0745

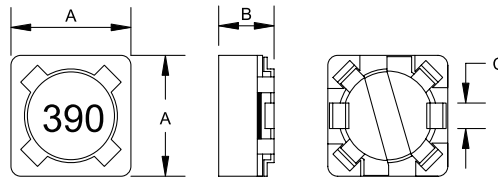

A: 7.3 ± 0.2
 B: 4.5 MAX.
 C: 2.0 ± 0.1

SPECIFICATION

ITEM	L	DCR	IDC
HCRH0745	(μ H)	MAX.(m Ω)	MAX.(A)
100M	10 \pm 20%	49	1.84
120M	12 \pm 20%	58	1.71
150M	15 \pm 20%	81	1.47
180M	18 \pm 20%	91	1.31
220M	22 \pm 20%	110	1.23
270M	27 \pm 20%	150	1.12
330M	33 \pm 20%	170	1.96
390M	39 \pm 20%	230	0.91
470M	47 \pm 20%	260	0.88
560M	56 \pm 20%	350	0.75
680M	68 \pm 20%	380	0.69
820M	82 \pm 20%	430	0.61
101M	100 \pm 20%	610	0.60
121M	120 \pm 20%	660	0.52
151M	150 \pm 20%	880	0.46
181M	180 \pm 20%	980	0.42
221M	220 \pm 20%	1170	0.36
271M	270 \pm 20%	1640	0.34
331M	330 \pm 20%	1860	0.32
391M	390 \pm 20%	2850	0.29
471M	470 \pm 20%	3010	0.26
561M	560 \pm 20%	3620	0.23
681M	680 \pm 20%	4630	0.22
821M	820 \pm 20%	5200	0.20
102M	1000 \pm 20%	6000	0.18

J: $\pm 5\%$, K: $\pm 10\%$, M: $\pm 20\%$

can design any part to your requirements with different inductance.

* All parameters as this content presented are subject to final specifications both sides confirmed.