



## HCRH124 TYPE

### TYPE

#### HCRH 124



### DIMENSION

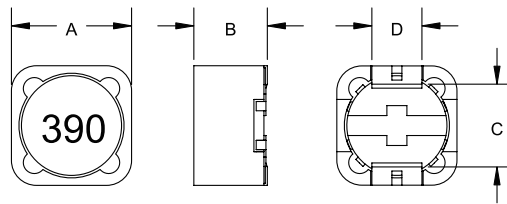

A: 12.0±0.3  
 B: 4.8 MAX.  
 C: 8.0±0.3  
 D: 5.0±0.2

### SPECIFICATION

ITEM	L	DCR	IDC
HCRH124	(μH)	MAX. (mΩ)	MAX. (A)
3R9M	3.9±20%	13	6.50
4R7M	4.7±20%	17	5.07
6R8M	6.8±20%	19	4.90
100M	10±20%	30	4.50
120M	12±20%	37	4.00
150M	15±20%	42	3.20
180M	18±20%	51	3.10
220M	22±20%	60	2.90
270M	27±20%	73	2.80
330M	33±20%	89	2.70
390M	39±20%	104	2.10
470M	47±20%	160	1.95
560M	56±20%	150	1.80
680M	68±20%	164	1.50
820M	82±20%	213	1.30
101M	100±20%	256	1.20
121M	120±20%	290	1.10
151M	150±20%	386	0.95
181M	180±20%	438	0.85
221M	220±20%	565	0.80
271M	270±20%	650	0.60
331M	330±20%	905	0.50
391M	390±20%	1350	0.40
471M	470±20%	1420	0.35
561M	560±20%	1640	0.32
681M	680±20%	1830	0.28

J: ± 5%, K: ± 10%, M: ± 20%

can design any part to your requirements with different inductance.

\* All parameters as this content presented are subject to final specifications both sides confirmed.