
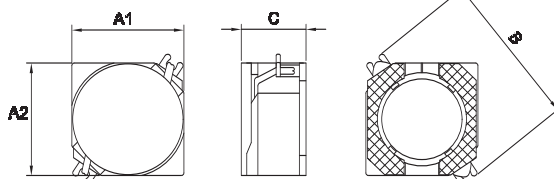


HCRH4D18 TYPE

TYPE

HCRH 4D18



A1: 5.0 MAX.
 A2: 5.0 MAX.
 B: 6.9 MAX.
 C: 2.0 MAX.

DIMENSION

SPECIFICATION

ITEM	L	DCR	IDC
HCRH4D18	(μ H)	MAX.(m Ω)	MAX.(A)
1R0N	1.0 \pm 30%	45	1.72
2R2N	2.2 \pm 30%	75	1.32
2R7N	2.7 \pm 30%	80	1.28
3R3N	3.3 \pm 30%	95	1.04
3R9N	3.9 \pm 30%	100	0.88
4R7N	4.7 \pm 30%	108	0.84
5R6N	5.6 \pm 30%	145	0.80
6R8N	6.8 \pm 30%	170	0.76
8R2N	8.2 \pm 30%	180	0.68
100N	10 \pm 30%	200	0.61
120N	12 \pm 30%	205	0.58
150N	15 \pm 30%	270	0.50
180N	18 \pm 30%	290	0.48
220N	22 \pm 30%	390	0.46
270N	27 \pm 30%	410	0.35
330N	33 \pm 30%	500	0.32
390N	39 \pm 30%	650	0.30
470N	47 \pm 30%	700	0.28

N: \pm 30%

can design any part to your requirements with different inductance.

* All parameters as this content presented are subject to final specifications both sides confirmed.