
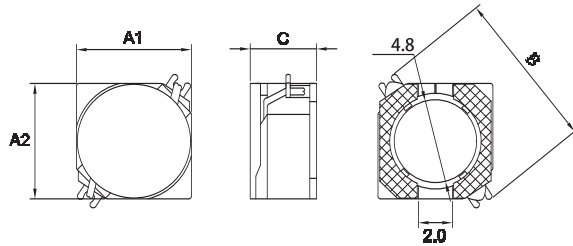


HCRH6D38 TYPE

TYPE

HCRH 6D38



A1: 7.0 MAX.
A2: 7.0 MAX.
B: 9.5 MAX.
C: 4.0 MAX.

SPECIFICATION

ITEM	L (μ H)	DCR MAX.(m Ω)	IDC MAX.(A)
HCRH6D38			
3R3N	3.3 \pm 30%	27	3.50
5R0N	5.0 \pm 30%	34	2.90
6R2N	6.2 \pm 30%	36	2.50
7R4N	7.4 \pm 30%	38	2.30
8R7N	8.7 \pm 30%	40	2.20
100N	10 \pm 30%	49	2.00
120N	12 \pm 30%	54	1.70
150N	15 \pm 30%	62	1.60
180N	18 \pm 30%	71	1.50
220N	22 \pm 30%	80	1.30
270N	27 \pm 30%	102	1.20
330N	33 \pm 30%	116	1.10
390N	39 \pm 30%	125	1.00
470N	47 \pm 30%	153	0.95
560N	56 \pm 30%	182	0.85
680N	68 \pm 30%	195	0.75
820N	82 \pm 30%	220	0.70
101N	100 \pm 30%	285	0.65

N: \pm 30%

can design any part to your requirements with different inductance.

* All parameters as this content presented are subject to final specifications both sides confirmed.