
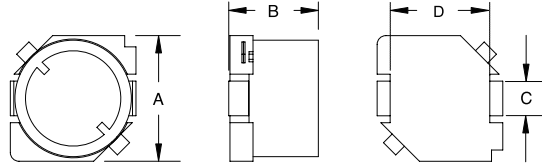


HPBS1045 TYPE

TYPE

HPBS 1045

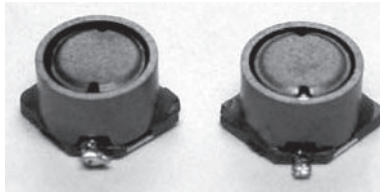

A: 10.1±0.3
 B: 4.5±0.3
 C: 3±0.1
 D: 6±0.2

SPECIFICATION

ITEM	L	DCR	IDC
HPBS1045	(μH)	MAX.(Ω)	MAX.(A)
100M	10±20%	0.0364	3.0
150M	15±20%	0.0472	2.4
220M	22±20%	0.0591	2.1
330M	33±20%	0.0815	1.6
470M	47±20%	0.10	1.4
680M	68±20%	0.14	1.1
101M	100±20%	0.20	0.95
151M	150±20%	0.35	0.79
221M	220±20%	0.47	0.65
331M	330±20%	0.68	0.50
471M	470±20%	1.03	0.47
681M	680±20%	1.60	0.38
102M	1000±20%	2.80	0.32
152M	1500±20%	3.40	0.22

K: ±10% M: ±20%

can design any part to your requirements with different inductance.

* All parameters as this content presented are subject to final specifications both sides confirmed.